

TWY7

7" WALL WASH TRACK LUMINAIRE

Wide Flood 105° x 97° wall wash track or monopoint luminaire with up to 5200 lumens delivered.

LUMENS / WATTAGE DATA

PART NUMBER	DELIVERED LUMENS	SYSTEM WATTS	LPW
TWY7 25L	2483	19.3	129
TWY7 35L	3386	27.1	125
TWY7 50L	5329	41	130

¹Nominal Delivered Lumens at 50L 35Kxx BET MW

PROJECT: _____

QUANTITY: _____

TYPE: _____



SERIES

Wide Flood 105° x 97° wall wash track or monopoint luminaire with up to 5300 lumens delivered.

180° of vertical tilt with degree indexing.

350° horizontal rotation.

Soft etch lens for visual comfort and protection of LED from dust.

For use with Spectrum BET Basix track system (Juno Compatible)

LISTING

cULus Certified. Suitable for dry locations.

PRODUCT SELECTOR GUIDE

SERIES	FAMILY	LUMENS	CCT	DIMMING	ADAPTOR	FINISH	ACCESSORIES
TW	Y7	50L		E1	BET		+ <input type="text"/>

EXAMPLE

TW	Y7	50L	35K	E1	BET	MW	+ <input type="text"/>
----	----	-----	-----	----	-----	----	------------------------


SERIES	FAMILY	LUMENS	CCT	DIMMING	ADAPTOR	FINISH	ACCESSORIES	
•TW	•Y7 7" Wall Wash	25L 2500 Lm	80 CRI	•E1 Electronic Low-Voltage (ELV) , 120V	•BET Basix 1 CIR/1 NEUT 120V	•MW Matte White •MB Matte Black	ORDER SEPARATELY BETHL7A Hex Louver BET70WH Mono Point Canopy White BET70BK Mono Point Canopy Black	
		35L 3500 Lm						•30K 3000K
		•50L 5300 Lm						•35K 3500K
								40K 4000K
		¹ Nominal Delivered Lumens						

■ DLC PREMIUM LISTED OPTIONS




COPYRIGHT 2023 SPECTRUM LIGHTING, INC.


FIXTURE DIMENSIONS

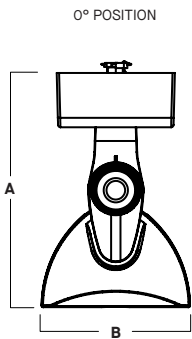


A	B
76	4.84
194.1 mm	122.9 mm

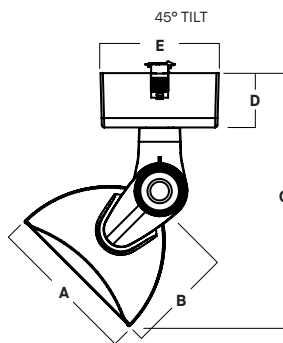

A	B	C	D	E
4.84	3.14	8.25	1.77	3.86
122.9 mm	79.8 mm	209.6 mm	45.0 mm	98.0 mm

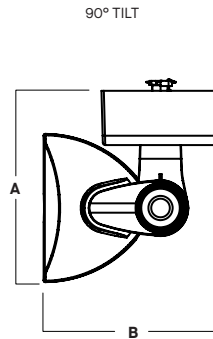


A	B
6.25	5.75
158.7 mm	145.9 mm

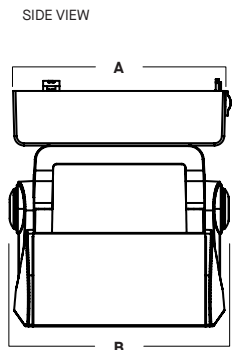

A	B
6.89	7.11
175.0 mm	180.7 mm

FIXTURE ACCESSORIES

BETHL7A
HEX LOUVER

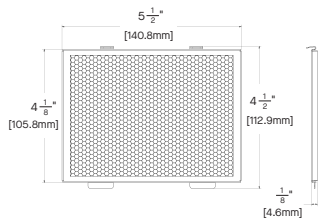


BET70WH/BK
MONO POINT CANOPY




TWY7 50L 35K xx BET MW


CANDLEPOWER CURVE TEST SP-01383	PERFORMANCE SUMMARY	REFERENCE DIAGRAM
------------------------------------	---------------------	-------------------

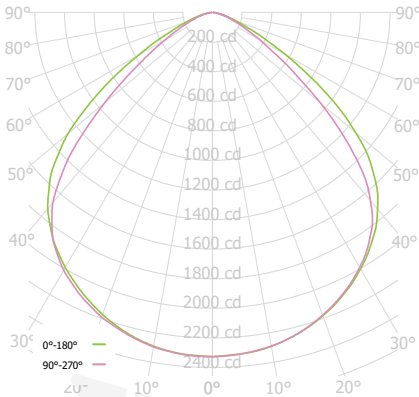


Delivered Lumens: 5329
 Luminaire Watts: 41
 LER: 129.98
 CP at 0deg (Nadir): 2326
 CRI: 80+
 Lumen Multiplier: N/A, only 50L tested
 CCT Multiplier: 30K x 0.93, 40K x 1.0

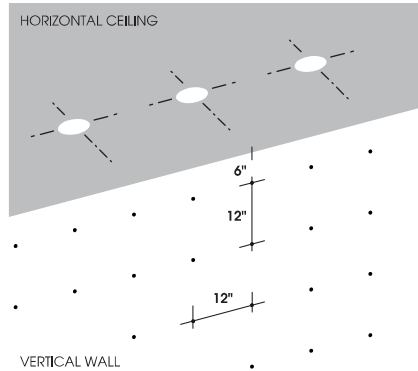


PERFORMANCE DATA - INITIAL ILLUMINATION (FOOTCANDLES) ON WALL - DIRECT LIGHT ONLY

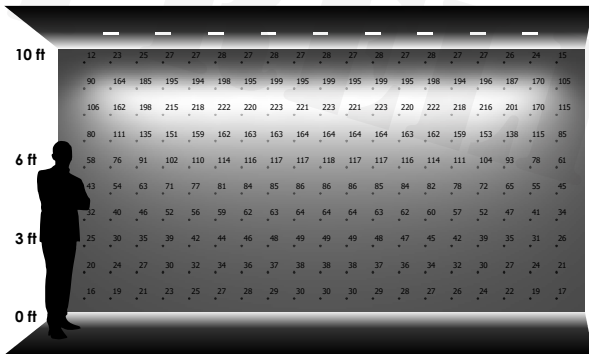


9 LUMINAIRES
 2' - 0" away from wall
 2' - 0" between luminaires

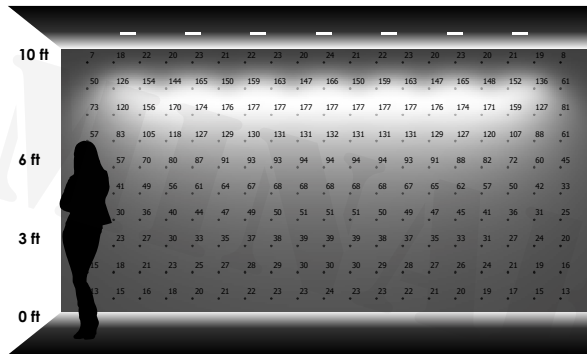

7 LUMINAIRES
 2' - 6" away from wall
 2' - 6" between luminaires

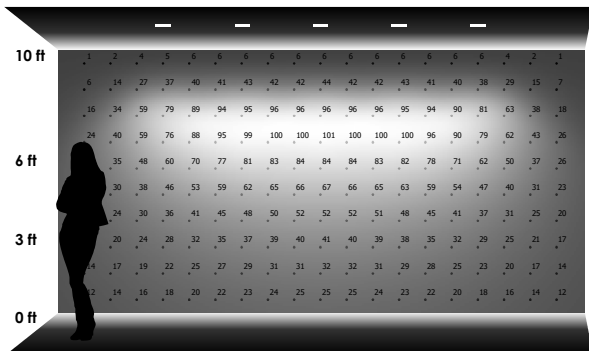

5 LUMINAIRES
 3' - 0" away from wall
 3' - 0" between luminaires

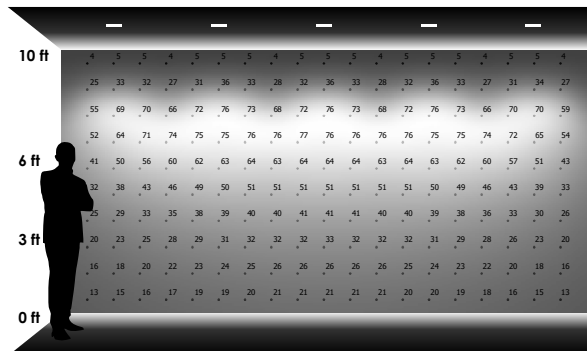

5 LUMINAIRES
 3' - 0" away from wall
 4' - 0" between luminaires