

TWA5 BET

5" WALL WASH TRACK LUMINAIRE

TWA5 fixture is a 64° wide flood wall wash track or monopoint luminaire with up to 2,970 lumens delivered.

LUMENS / WATTAGE DATA			
PART NUMBER	DELIVERED LUMENS*	SYSTEM WATTS	LPW
TWA5 30L BET	2983	27	110

* 1 Nominal Delivered Lumens

PROJECT: _____
 QUANTITY: _____ TYPE: _____



FEATURES

- 80+ CRI with 3 Step MacAdam color binning.
- 135° of vertical tilt.
- 350° horizontal rotation.
- Soft etch lens for visual comfort and protection of LED from dust.
- For use with Spectrum BET Basix track system (Juno Compatible).

LISTING

ETL Listed for dry location.

Manufactured and tested to UL standards No. 1574.

WARRANTY

5 Year warranty standard. L70>60,000 hours.

PRODUCT SELECTOR GUIDE

SERIES	FAMILY	LUMENS	CCT	DIMMING	ADAPTOR	FINISH	ACCESSORIES
TW	A5	30L		E1	BET		+ <input type="text"/>

EXAMPLE

TW	A5	30L	35K	E1	BET	MW	+ <input type="text"/>
----	----	-----	-----	----	-----	----	------------------------


SERIES	FAMILY	LUMENS	CCT	DIMMING	ADAPTOR	FINISH	ACCESSORIES
TW	A5 - 5" Wall Wash	30L - 2970 Lm	30K - 3000 K 35K - 3500 K	E1 - Electronic Low-Voltage (ELV)/TRIAC, 120V	BET - Basix 1 CIR/1 NEUT 120V	MW - Matte White MB - Matte Black	ORDER SEPARATELY BETHL7A Hex Louver BET70WH Mono Point Canopy White BET70BK Mono Point Canopy Black

GREEN TEXT INDICATES QUICK SHIP OPTIONS



COPYRIGHT 2023 SPECTRUM LIGHTING, INC.

FIXTURE DIMENSIONS

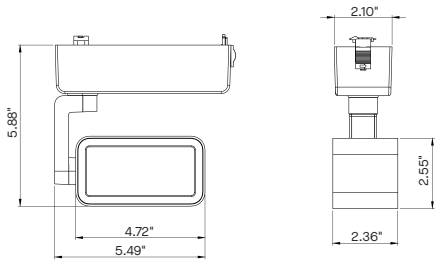


FIXTURE ACCESSORIES

BETHL7A
HEX LOUVER



BET70WH/BK
MONO POINT CANOPY

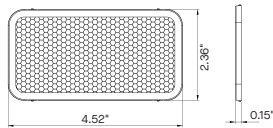

TW - A5 - 30L - 30K - xx - xx - MW

CANDLEPOWER CURVE TEST TWA5-1	PERFORMANCE SUMMARY	REFERENCE DIAGRAM
	Delivered Lumens: 2983 Luminaire Watts: 27.01 LER: 110.44 CP at 0deg (Nadir): 2723 CRI: Lumen Multiplier: CCT Multiplier:	


PERFORMANCE DATA - INITIAL ILLUMINATION (FOOTCANDLES) ON WALL - DIRECT LIGHT ONLY

<p>THREE LUMINAIRES 2'-0" away from wall 4'-0" on center</p>	<p>THREE LUMINAIRES 2'-6" away from wall 4'-0" on center</p>
<p>THREE LUMINAIRES 3'-0" away from wall 4'-0" on center</p>	<p>THREE LUMINAIRES 3'-6" away from wall 4'-0" on center</p>


TW - A5 - 30L - 30K - xx - xx - MW

CANDLEPOWER CURVE TEST TWA5-1	PERFORMANCE SUMMARY	REFERENCE DIAGRAM
	Delivered Lumens: 2983 Luminaire Watts: 27.01 LER: 110.44 CP at 0deg (Nadir): 2723 CRI: Lumen Multiplier: CCT Multiplier:	


PERFORMANCE DATA - INITIAL ILLUMINATION (FOOTCANDLES) ON WALL - DIRECT LIGHT ONLY

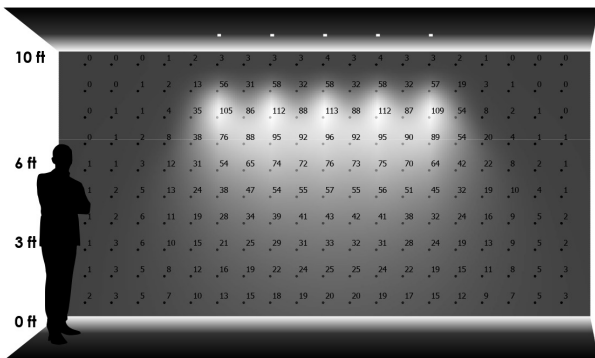


THREE LUMINAIRES
2'-0" away from wall
4'-0" on center

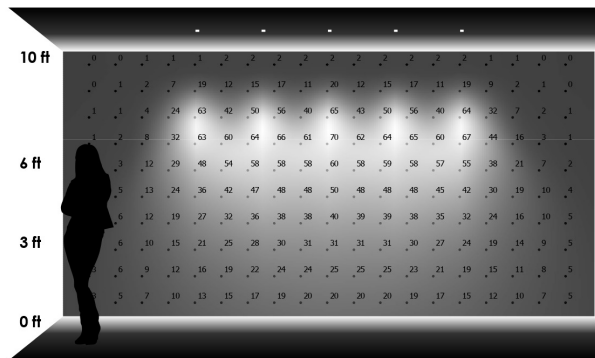

THREE LUMINAIRES
2'-6" away from wall
4'-0" on center

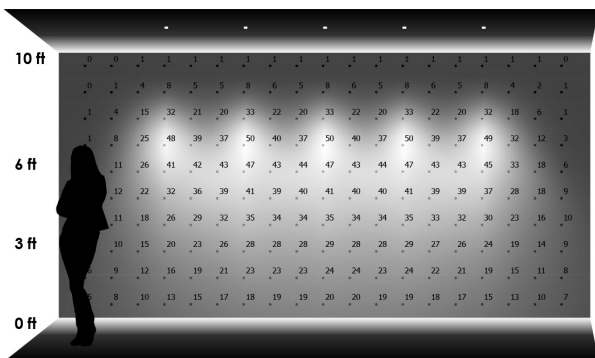

THREE LUMINAIRES
3'-0" away from wall
4'-0" on center

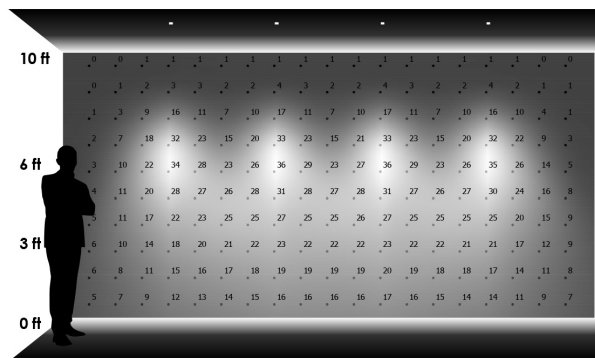

THREE LUMINAIRES
3'-6" away from wall
4'-0" on center